


Springs



Via Gitti, 56 - 25060 Marcheno (BS) Italia tel. +39 030 861272

fax +39 030 8966654 e-mail info@vineyardstore.net www.vineyardstore.net

TECHNICAL SPECIFICATIONS

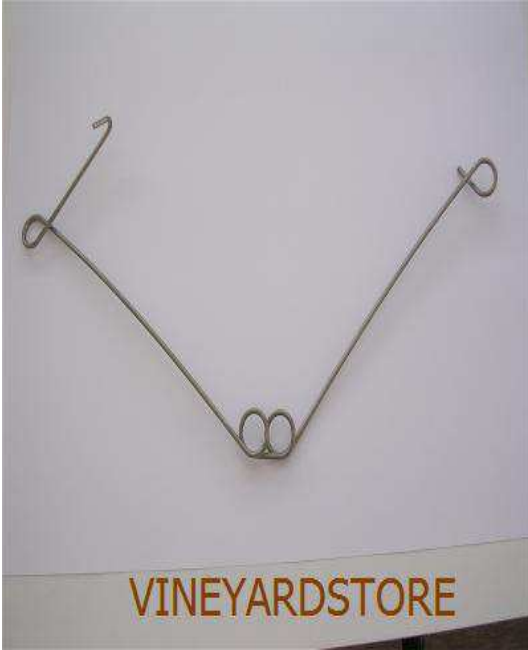

Accessories for the shoots paling management by containing mobile wires, inserted in the eyelet at the end of a metal spacer that is fixed to the pole. When the spacers are open the two wires are at a distance of 45 cm. from each other allowing the spontaneous entry of vegetation, when they are closed (manually by the operator when the vegetation is sufficiently grown) they are raised by 20 cm. respect to the anchor point of the spacer and tighten their distance from 45 to 5 cm. In this way the vegetation is limited in width and directed upward with an operation that for the operator means only to walk from one pole to another and pick up the wire locking the spacer located on the pole.


This accessory allows indeed to manage the pair of wires without disconnecting them. In particular:

- with open spring, the pair of wires remain very wide apart in order to allow the vine-shoots to grow within
- with closed spring, the vegetation is pushed towards the pole and forced to continue the upward growth. This operation shall be made before the mechanical harvesting

Typology and supplying:

Springs	Typology	Typology
Metal posts	without hook closing	with hook closing
Wooden posts	without hook closing	with hook closing
Concrete posts	without hook closing	with hook closing
Post T	without hook closing	with hook closing

EXAMPLES OF SPRING:

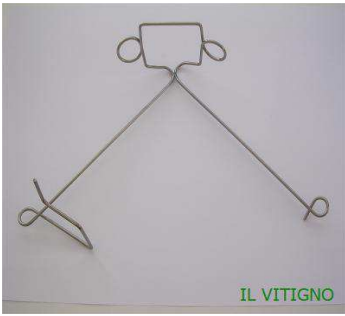

Spring for concrete posts



Spring for wooden posts



Spring for metal posts
senza gancio di chiusura



Spring for posts T